


## EBC 90HT

COMAC co-rotating twin screw extruder for high size production of masterbatches and compounds

The picture shows the extruder provided with one lateral feeder designed for the production of PA or PP reinforced with fiber glass.

### TECHNICAL FEATURES

- High torque gear reducer
- High shear rate and mixing capacity
- Touch screen control panel
- Barrel and screws with modular configuration
- Serial Door for communication with external PC

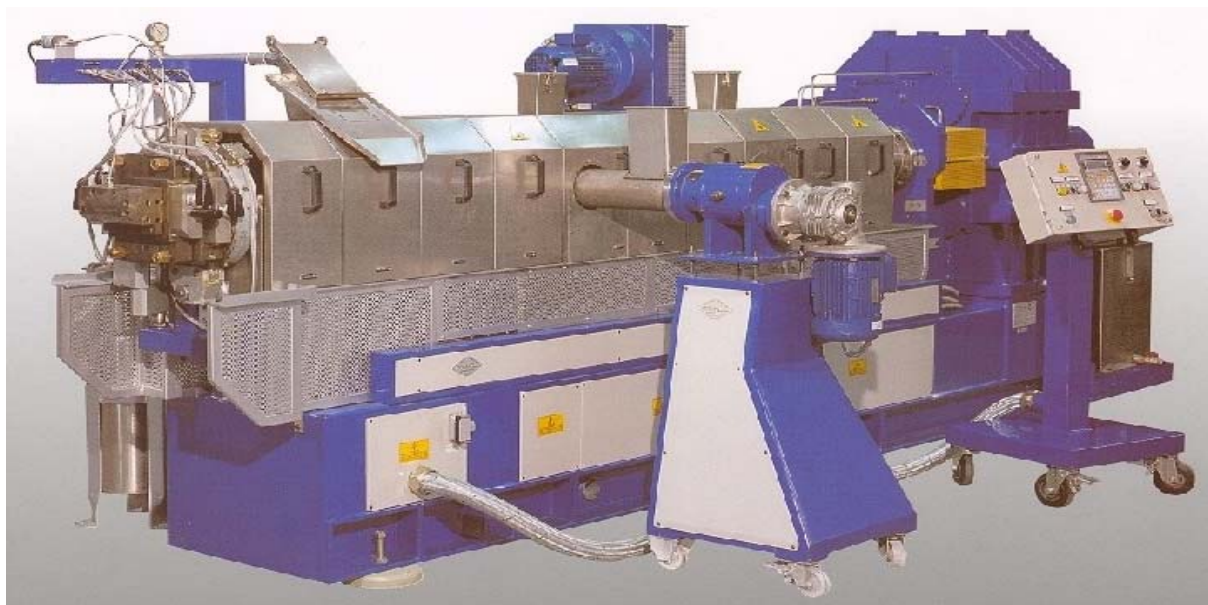

### TECHNICAL DATA

Screws Ø (mm) 2 lobes	92
Screws geometry	2 lobes
Threads depth (mm)	16,5
Screws rpm	600
Main drive power (kW)	440
Torque value for each screw (Nm)	3600
Barrel module length (mm)	4D
L/D ratio	up to 48
Output min/max (kg/h) depending on formulation	800/3500